


ASTM D178 SWITCHBOARD MATTING


products are tested and certified to the most rigorous industry standards. Every roll is proof tested at the specified voltage per class over the entire surface. Single piece rolls are guaranteed.

This nonconductive matting is engineered and tested to protect workers from shock in high voltage applications within product specifications.

TYPE II, CLASS 2 CORRUGATED

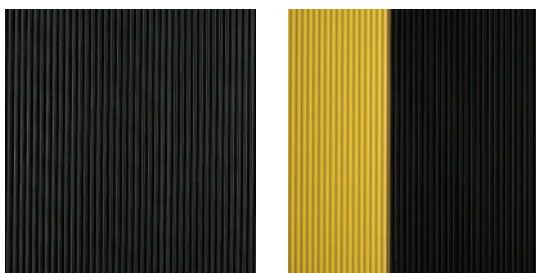

TYPE II, CLASS 2 DIAMOND PLATE

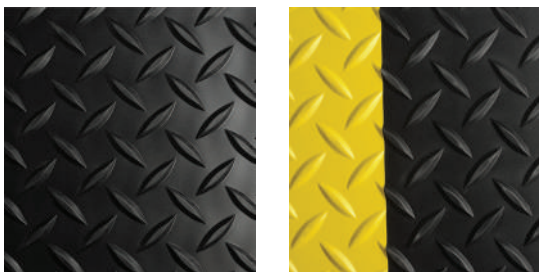

PROVEN INDUSTRIAL MATTING SOLUTIONS

When it comes to quality matting, Westlake Dimex is a name you can count on for dependable performance. Westlake Dimex Matting Products are the result of years of research, testing, and development. We lead the industry in product quality, availability, and customer support. No matter what your matting needs may be, Westlake Dimex can deliver the perfect solution.

TYPE II, CLASS 2 CORRUGATED AND DIAMOND PLATE

SWITCHBOARD MATTING (ASTM)

TYPE II, CLASS 2 CORRUGATED

Part No.	Color/Finish	Thickness	Width	Length	Weight
2V-014-24-75DC	Black	1/4"	24"	75'	240
2V-014-36-75DC	Black	1/4"	36"	75'	350
2VY-014-36-75DC	Black/Yellow Border	1/4"	36"	75'	350
2V-014-48-75DC	Black	1/4"	48"	75'	470

Tested at 20,000 VAC Recommended Maximum Use Voltage: 17,000 VAC

TYPE II, CLASS 2 DIAMOND PLATE

Part No.	Color/Finish	Thickness	Width	Length	Weight
2D-014-24-75DC	Black	1/4"	24"	75'	240
2D-014-36-75DC	Black	1/4"	36"	75'	350
2DY-014-36-75DC	Black/Yellow Border	1/4"	36"	75'	350
2D-014-48-75DC	Black	1/4"	48"	75'	470

Tested at 20,000 VAC Recommended Maximum Use Voltage: 17,000 VAC

The type defines the compound that is used in the manufacture of the switchboard matting in the ASTM D178 specification. Westlake Dimex manufactures both Type I and Type II.

Dimex[®] Switchboard Matting (ASTM) is available in:

- Type I, Class 1 Corrugated
- Type II, Class 1 Corrugated
- Type II, Class 2 Corrugated
- Type II, Class 2 Diamond Plate
- Type II, Class 3 Corrugated
- Type II, Class 4 Corrugated